



Oprawa rynienkowa z opalizującą pokrywą

Surface-mounted luminaire in IP50 with opal diffuser 4/14W, for light source T16, Dimming On Demand (DOD): dimming function can be optionally enabled via Litenet-Flexis with digitally addressable, switchable DALI electronic ballast, housing made of white painted roll-formed sheet steel; injection-moulded diffuser made of opal; high protection type IP50 favourably affects maintenance factor. High-quality polyurethane foam sealing surround; 4-point fixing using slotted washers supplied. Dimensions: 620 x 620 x 90 mm; weight: 4.58 kg.

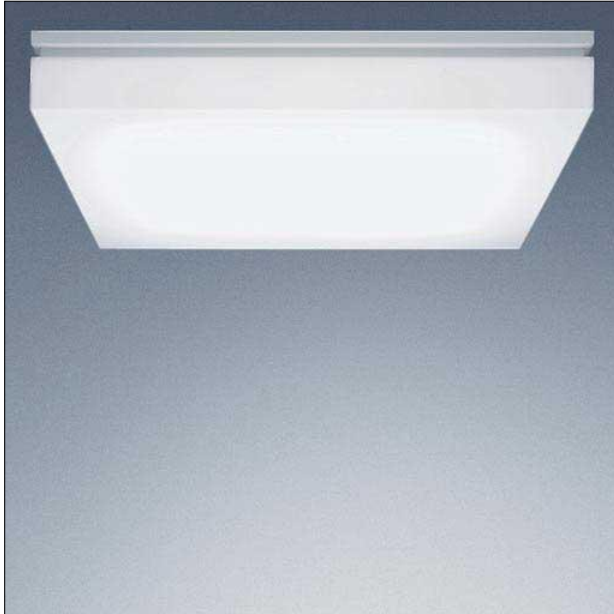


ZS_PER_F_opal-quadra_3.jpg

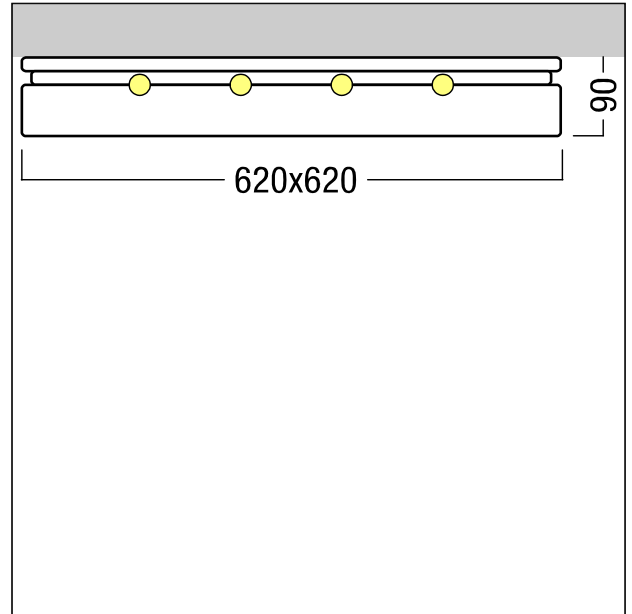

ZS_PER_M_Perluce-quadT16.wmf

Rozsył światła

STD - Standard

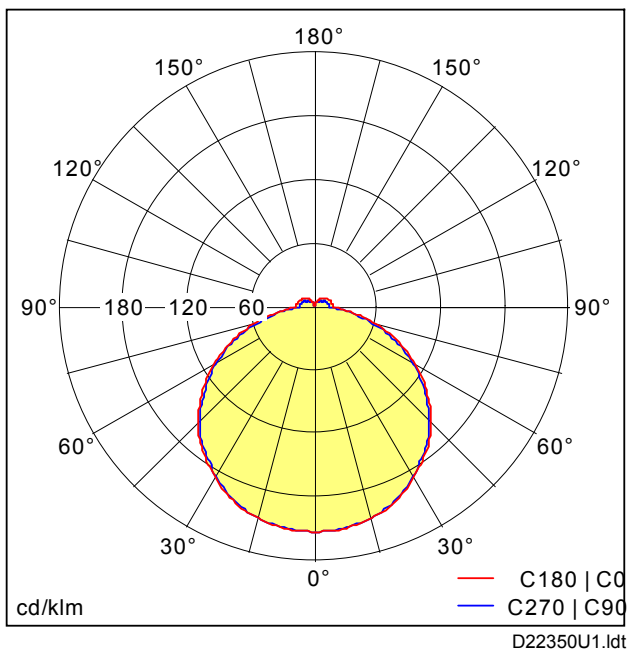

- Lampy: 4 x T16 / 14W
- Całkowity strumień światła: 4800 lm
- stopień odwzorowania barw: 1B
- urządzenie robocze: EVG DOD Tridonic PC DOD one4all
- moc przyłączeniowa: 71,2 W $\Lambda = 0,97$
- sterowanie: LDOD ściemniany do 3%
- CELMA: A1