


## spotlight

Spotlight, white; with Zumtobel 3-phase universal adapter; Luminaire or spotlight with FLOOD distribution characteristics, with rotationally symmetrical reflector in silver colour; lamp(s): 1/150W HIT-CE; lampholder: G12; includes high frequency ballast in separate TRACKBOX ADAPTER made of die-cast aluminium and polycarbonate; mains voltage: 220-240V/ 50/60Hz; spotlight unit can rotate through 360° and tilt through 90°; 2-piece spotlight housing made of die-cast aluminium, surface finish: microtextured white paint finish; front cylinder fixed to rear housing by twist-and-lock mechanism (for easy lamp and reflector replacement); specular reflector: silver anodised high-grade aluminium, includes protective glass cover which can be replaced with blocking filter; specular reflector designed for easy replacement and conversion; front cylinder also designed to take accessories; dimensions: 130 x 307 x 252 mm; weight: 2.05 kg;

Please note: cannot be wall-mounted; not suitable for point outlets.




ZS\_VIV\_F\_L\_w.jpg

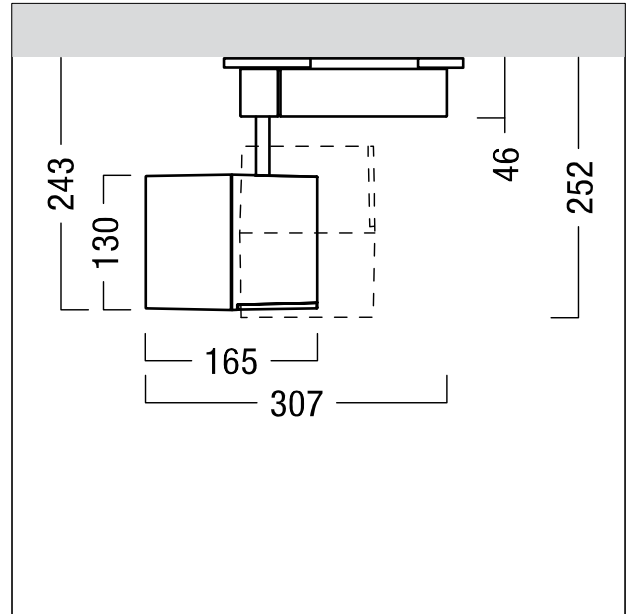

ZS\_VIV\_M\_L\_3CV\_NEU.wmf

## Light Distribution

## STD - standard

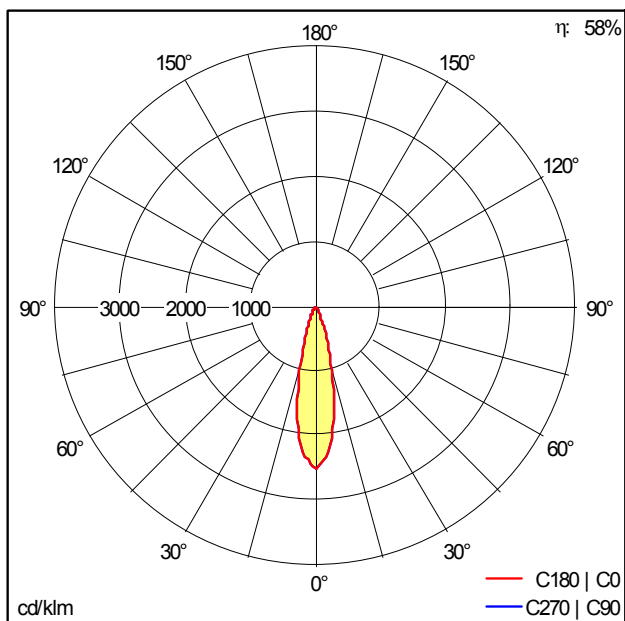

ST5842.Idt

- Lamps: 1 x HIT-CE / 150W
- Total luminous flux of luminaire: 8120 lm
- Luminaire efficacy: 50 lm/W
- Colour Rendering Index min.: 80
- Ballast: EVG
- Connected Load: 162 W Lambda = 0.97
- Maintenance category: C - Closed Top Reflector